


AUSTRALIA - BULGARIA - INDIA - INDONESIA - ITALY - MALAYSIA - NEW ZEALAND - PANAMA - PHILIPPINES - SINGAPORE - SPAIN - UK - USA - VENEZUELA - VIETNAM

sales@seaboats.net - www.seaboats.net

36m 4000BHP Towing Tug

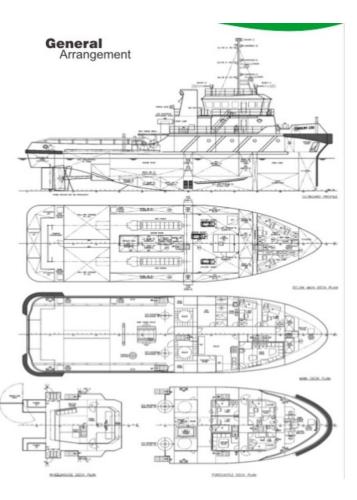

Listing ID - 4259

Description 36m 4000BHP Towing Tug

Date 2007

Launched

Length 36m (118ft 1in)

Beam 10.60m (34ft 9in)

Draft 4.50m (14ft 9in)

Note Bollard Pull: 54.1 T

Location Sarawak, Malaysia

Broker Richard Pierrepont

richard.pierrepont@seaboatsbrokers.com

+44 7798 607 323

Year Built / Builder: 2007 / Guangzhou South China SDN BHD

Flag: Malaysia Class: BV

Length Overall: 36m Breadth Moulded: 10.60m Depth Moulded: 5.30m

Draft: 4.50m

Deadweight: 379.268T

GRT: 495 T NRT: 148 T

Accommodation

14 Men

1 Man x 4

2 Men x 3

4 Men x 1

Machinery

Main Engines: 2 x ZIBO LB8250ZC-1 (2 x 2000BHP)

Propulsion: Manganese Bronze / 4 Blades Solid with key Dia. 2.65 m Fixed Pitch in Kort Nozzle

Main Generator: 2 x Cummins NTA855-D(M), 2 x 250 kVA Harbor Generator: 1 x Cummins 6BTA5.9-D(M), 1 x 78 kW Boiler: 2 x Oil and Gas Fire Auxiliary Boilers 25 m3, 0.7 bar Oily Water Separator: Georim Engineering, GRS-05EB, 0.5 m3/hr. Sewage Treatment Plant: Weihai WCB-20, 1.54 m3/day, 20P

Capacities 100%

Fuel Oil: 80.40 m3 Fresh Water: 52.60 m3

Freezer and Cooler: 2.52 m3 / 2.52 m3

Clear Deck Area: 75 m2 Deck Strength: 5 T

Performance

Max Speed: 12 knots Service Speed: 10 knots Bollard Pull: 54.1 T

Transfer Rates

Fuel Oil: 2 x 12 m3/hr @ 5 m head

Navigation and Communication

Inmarsat C : 2 x Furuno Felcom 15 GMDSS: Comply GMDSS A1+A2+A3

Radars: 1 x Furuno FR-1510 Mark 3, 1 x Furuno 1832 GPS Navigator: 1 x Furuno GP-80, 1 x Furuno GP-32

Autopilot: Unikas CD-50

Navtex Receiver: Furuno NX-700 Magnetic Compass: Daiko SR-150SLK MF / HF SSB DSC: Furuno FS-2571C Echo Sounder: Furuno FE-700

VHF Radio Telephone: 2 x Furuno FM-8800S GMDSS Hand Held Radio: 3 x Entel Ht644

SART: 2 x Safe Sea S100 EPIRB: GME MT403FF Barometer: Mingle AIS: Furuno FA-150 Speed Log: Furuno DS-80 BNWAS: Rockson Guardian VII

Towing / Anchor Handling / Mooring

Towing Drum Wire: 44mm, 500m Towing Winch: 500 kn HTM

Anchor Windlass: 20.6 kn YMO 8072 Anchors: 2 x Stockless Anchor 660 kg

Anchor Chain: 22 mm Dia. x 27.5m x 6 Length each side

Capstan: 3T

Single Armed Davit: 0.5 T @ 5 m/min, Lutao

Fire-fighting and Safety Equipment

Fire Hydrants: 5 nos.

Fire Extinguishers: 2 x 45 Liters Foam, 4 x 9 Liters Foam, 6 x 9 kg DP, 4 x 9 LW

Safety Equipment: 1 BA Set, 2 x 15 per Life Raft

Fire Detection and Alarm System: Ruian Zhongrui Electron Equipment Co. Ltd.

The details of all vessels are offered in good faith but we cannot guarantee or warrant the accuracy of this information nor warrant the condition of the vessel. Any buyer should instruct their agents, or their surveyors, to investigate such details as the buyer desires validated. This vessel is offered subject to sale, price change, location or withdrawal without notice.



AUSTRALIA - BULGARIA - INDIA - INDONESIA - ITALY - MALAYSIA - NEW ZEALAND - PANAMA - PHILIPPINES - SINGAPORE - SPAIN - UK - USA - VENEZUELA - VIETNAM